



GOBOSERVICE

Gobos and Projectors 100% made in Italy






# DIVUM 30K Plus



The new Divum 30K Plus adds to the recognized qualities of the standard version two new optical options that meet the requirements of the mapping and architecture market. The 140 mm (12°) can be used over distances previously inaccessible with unmatched level of detail and brightness, and the 59 mm (38.8°) incredibly efficient over small distances and capable of illuminating large-amplitude surfaces without losing brightness.





## DIVUM 30K Plus

### BODY

|                   |                        |
|-------------------|------------------------|
| Material          | Aluminium - Steel      |
| Protection Rating | IP54                   |
| IK Raing          | IK09                   |
| Surface Finishing | Blck Painting RAL 9005 |

### POWER SUPPLY



|            |                  |
|------------|------------------|
| Power Mode | 250W             |
|            | 110-240V 50/60Hz |

### MAIN FEATURES

|                       |                   |                 |
|-----------------------|-------------------|-----------------|
| Light Source          | 200W CITEDLED COB |                 |
| Colour Temperature    | 6.000 °K          |                 |
| Luminous Flux Source  | 25.576 lm         |                 |
| Optical System        | 59 mm             | 140 mm          |
| Gobo Size             | I.D. ø40mm        | I.D. ø30mm      |
| Angular Aperture      | 38,8°             | 12°             |
| Illuminance max at 5m | 835 lux           | 5825 lux        |
| Optical Efficiency    | 24%               | 11,4%           |
| Total Lumen Output    | <b>6.150 lm</b>   | <b>2.925 lm</b> |
| Luminous Efficacy     | 30,75 lm/W        | 14,65 lm/W      |

### WEIGHT

12 kg

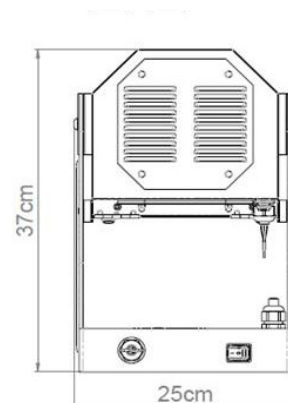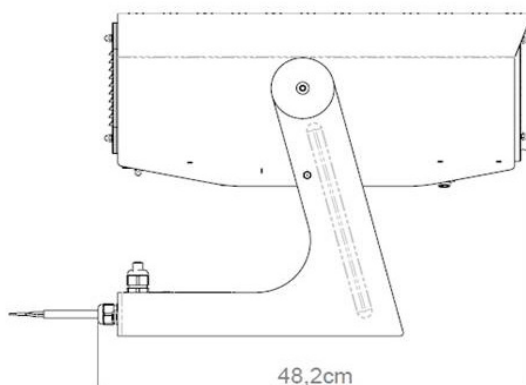



## DIVUM 30K Plus

|                           | <b>CODE</b> | <b>COMPATIBLE WITH 30K</b>        |
|---------------------------|-------------|-----------------------------------|
| Divum 30Kplus_s           | 108A000     |                                   |
| Lens 59 mm                | 1089310     | Yes, contact the technical office |
| Lens 140 mm               | 1089400     | No                                |
| Dynamic Effect            | 1086110     | Yes                               |
| Gobo Changer              | 1084200     | Yes                               |
| Gobo Holder               | 1084310     | Yes                               |
| Beam Shaper (I.D.Ø64mm)   | 1088000     | Yes                               |
| Electric plug Schuko IP54 | SPN0001     | Yes                               |
| Extendable Stand          | 1161000     | Yes                               |
| Standard Wheel            | 117XX00     | Yes                               |

## CONFIGURATIONS

|                         |                |
|-------------------------|----------------|
| Divum 30Kplus_s         | 108A000        |
| Lens 59 mm              | 1089310        |
| Gobo Holder             | 1084301        |
| <b>Divum 30K Plus-W</b> | <b>108A310</b> |

|                          |                |
|--------------------------|----------------|
| Divum 30kplus_s          | 108A000        |
| Lens 140 mm              | 1089400        |
| Gobo Holder              | 1084301        |
| <b>Divum 30K Plus-XN</b> | <b>108A400</b> |